


Wall lighting fixture for interiors, with indirect light emission.
 Pickled sheet metal structure in matt white polyacrylic paint.
 Aluminium dissipation plate.
 Pickled sheet metal cover shield in polyacrylic paint.
 Flat frosted glass diffuser.

TECHNICAL DATA




Code	A06001.000.0101
System power consumption	14W
Efficacy	74.79lm/W
Light source	LED
Light source lifetime	L90 (B10) 50000h
Colour temperature	3000K Ra >80
Light distribution	diffused
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	ON-OFF
Driver	integrated included
Nominal luminous flux	1730lm
Lumen output	1047lm
Efficiency	60.520%
Weight	0,7350Kg
Protection degree	IP20
Colour tolerances	SDCM3
Packing dimensions (cm)	14 x 30 x 16

POLAR DIAGRAM

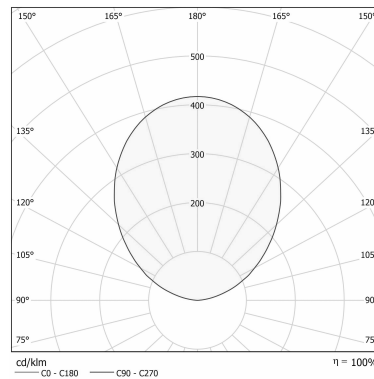

TECHNICAL DRAWING

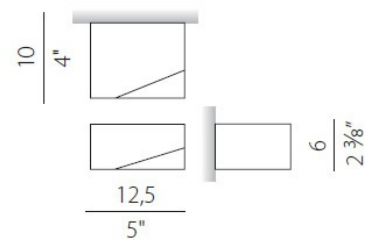

COLOUR

matt white

